

TDS1039L 16:10 (Light bar)

Open-Frame Touchscreen



Features

- + Metal shell, open frame design
- + Flat and zero bezel appearance
- + Commercial grade LCD, LED backlight
- + Resolution 1280X800@60Hz
- + 10-point projection capacitive touchscreen
- + There are colored light bars all around
- + Single color, multi-color, and marquee can be set
- + COB light bar with soft and even lighting
- + Provides serial port for programming control
- + Customizable light bar modes based on application
- + Video interface: HDMI+VGA
- + Multiple assembly holes on the side and back
- + Support OS: Windows/Android/Linux
- + 2-year Warranty






Optional:

- No Touch
- AG Coating
- Video interface: Display Port
- All-in-one(Built in motherboard)



TDS1039L Open-Frame Touchscreen Specifications(light bar)	
Model	1039L
Color	Black/Silver
Diagonal	10.1"/16:10
Active area	216.96X135.6(mm)
Dimensions	258.2X180.8X37 (mm)
Resolution	1280X800@60Hz
Viewing Angle	Horizontal: 85°/85° Vertical: 85°/85°
Number of Colors	16.7M
Brightness	LCD Panel: 300nits; PCAP Touch: 275 nits
Contrast Ratio	800 : 1
Touch Technology	PCAP(ProjectedCapacitive)-10Touch
Surface hardness	6H(Mohs)
Light bar	<p>Lighting mode: Standard:monochrome (Pink/Red/Yellow/Green/Orange /Ice Blue/ Blue/ White/) Optional:Multi-color(7 color rotation variations/Full color RGB rotation variation)</p> <p>Control mode : Standard:external control(Remote Control) Optional:Serial port control (Provides serial port communication protocol)</p> <p>Width:3mm Lighting angle: 180° Working voltage: 5V Waterproof level: IP20</p>
Speaker	2*2W(Optional)
I/O Interface	1*USB 2.0(for touch),1*HDMI,1*VGA,1*DC , 1*COM (Optional for light)
Input Voltage	AC:100-240 VAC, 50/60 Hz
Sealability	Touchscreen sealed to bezel
Mounting Options	Back VESA two groups of holes : 75mm&100mm Four sides has a set of fixing holes : 142mm
Drop Test	200g steel ball falls from 0.8m without breaking
Weight (Unpackage)	1.5KG
Shipping Dimensions	350X20X140(mm)
Temperature	Operating: 0 °C to 40°C; Storage : -20°C to 60°C
Humidity	Operating: 20% to 70% ; Storage: 10% to 80%
MTBF	30,000 Hours
Power Supply	DC:12V3A
What' s in the Box	1*USB cable,1*HDMI cable,1*DC cable,1*RJ OSD Remote(Standard) L" (Side Mount) Brackets and w/Screws(Options)
Agency Approvals	FCC; CE; ROHS

TDS1039L-PCAP

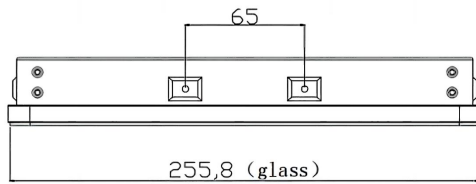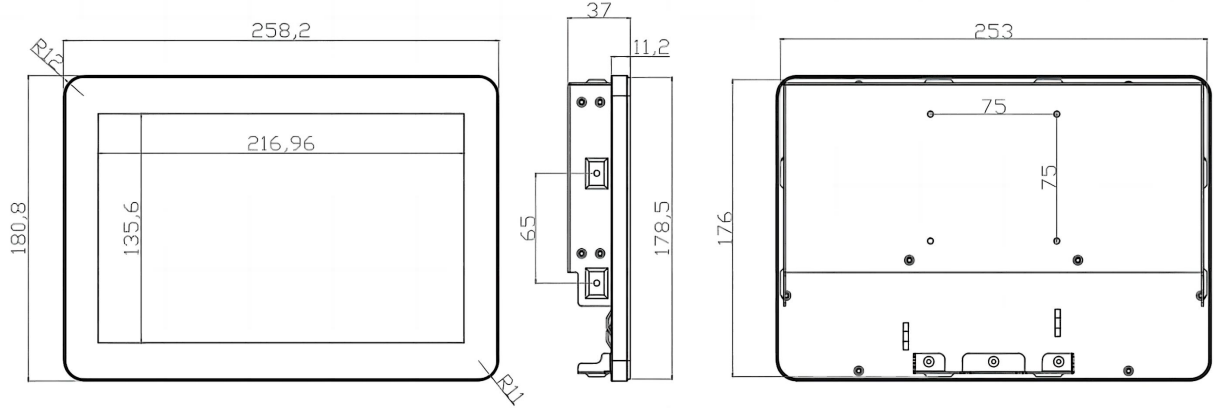

Dimensions are in millimeters

