

1539E 4:3 PCAP

Open-Frame Touchscreen



Feature:

- + Metal shell, open frame structure
- + Flat and zero bezel appearance
- + Industrial grade LCD, LED backlight
- + Resolution 1024X768@60Hz
- + Standard aspect ratio, high brightness and contrast
- + 10 point projection capacitive touch screen
- + Cover plate anti riot and anti fingerprint
- + Supports palm rejection and glove touch
- + Video interface: HDMI+VGA
- + Multiple assembly holes on the side and back
- + Support OS: Windows/Android/Linux
- + 3-Year warranty



Optional:







- No Touch
- Privacy Filter
- AG Coating
- Touch interface: RS232
- Video interface: Display Port



TDS1539E Open-Frame Touchscreen Specifications

Model	1539E
Color	Black/Silver
Diagonal	15''
Aspect Ratio	4:3
Active Area	304.128X228.096(mm)
Dimensions	358X284.8X42.1(mm)
Resolution	1024X 768DPI@60Hz
Viewing Angle	Horizontal: 85°/85°,Vertical: 85° /85°
Number of Colors	16.2M
Brightness (typical)	LCD Panel: 350nits,PCAP: 325nits
Response Time	25ms
Contrast Ratio	1000:1
Touch Technology	PCAP,10-point, USB control interface
Transmittance	≥90%
Surface hardness	7H(Mohs)
Touch Method	Finger, Capacitance pen, Gloves touch (Thickness < 2 mm)
Video Interface	VGA+HDMI
Input Voltage	AC:100-240 VAC, 50/60 Hz
Sealability	Touchscreen sealed to bezel
Drop Test	450g steel ball falls from1.2m without breaking
Weight (Unpackage)	2.7KG
Shipping Dimensions	455X340X135(mm)
Operating Temperature	0°C to 40°C
Storage Temperature	-20°C to 60°C
Humidity	Operating: 20% to 70%; Storage: 10% to 80%
Mounting Options	Back VESA two groups of holes: 75mm&100mm Four sides has a set of fixing holes: 142mm
MTBF	50,000 hours demonstrated
Power Supply	DC:12V3A
Warranty	3-year
Agency Approvals	FCC, CE, ROHS
Support OS	Windows/Linux\Android
What's in the Box	1*USB cable,1*VGA cable,1*DC cable (Standard) L'' (Side Mount) Brackets and w/Screws (Options)

TDS1539E-PCAP

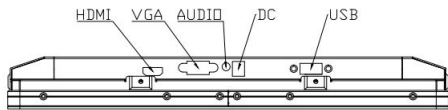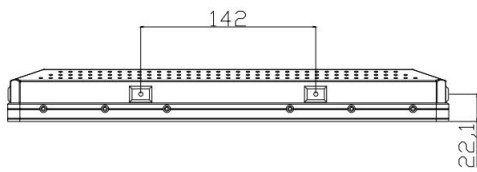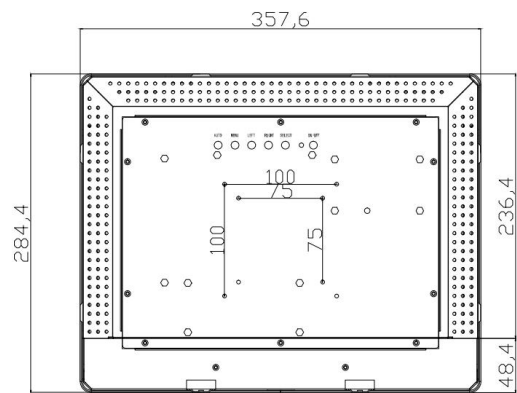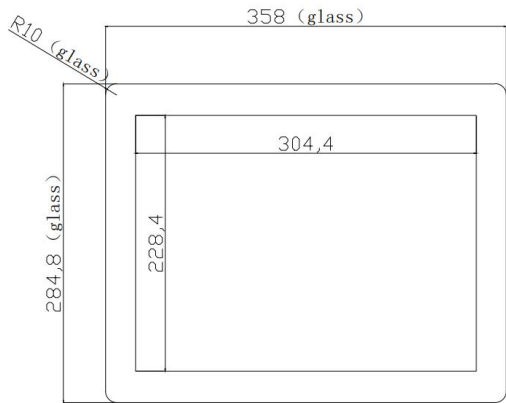

Dimension in millimeter

